


DELFI SICINAS

- Security bar INOX AISI 316 where it releases water.
- PRFV with UV protection
- Safety caps and stainless bolts and nuts included.
- Access aid handles
- High protection barriers
- Water intake
- Non-slip steps
- Foot support in INOX AISI 316

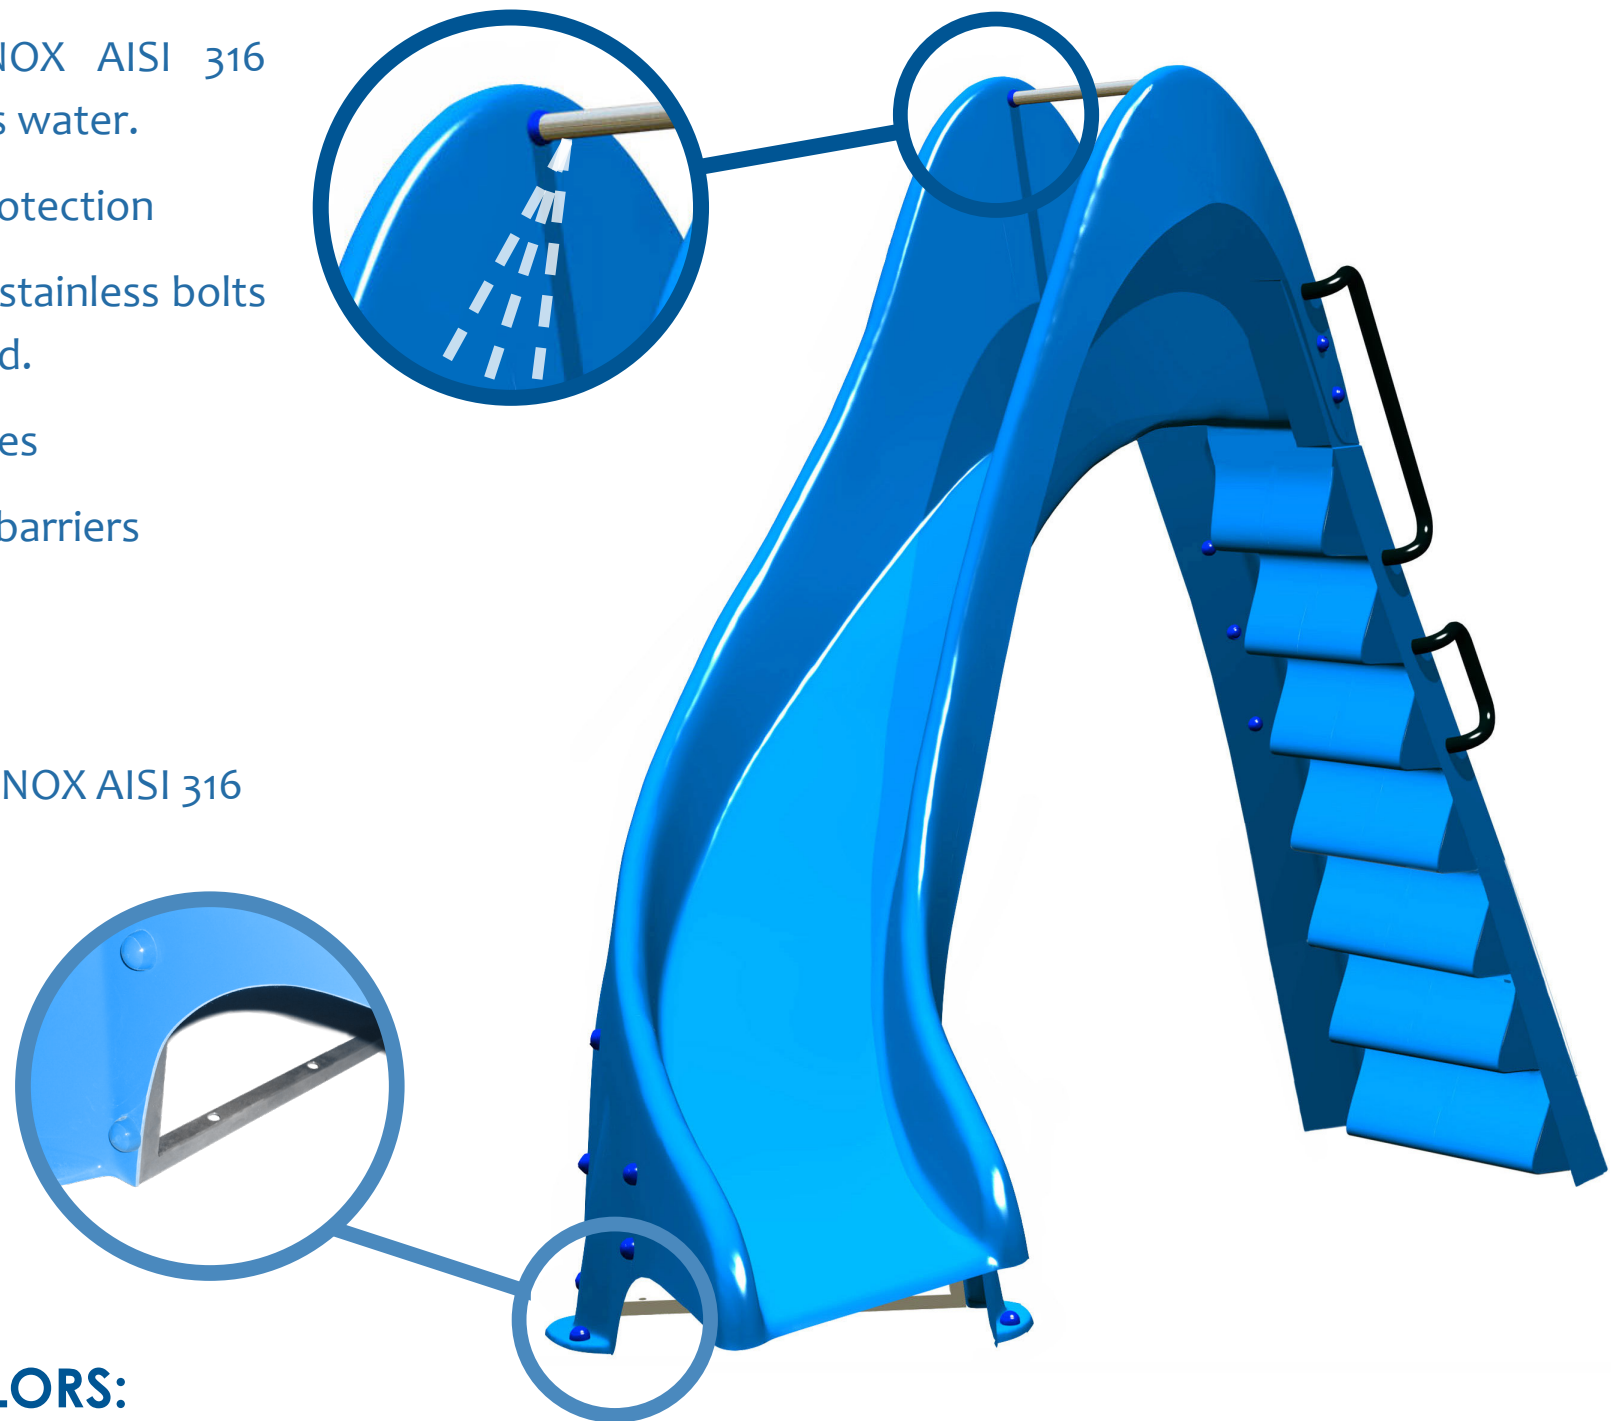

AVAILABLE COLORS:

GREY
RAL7040

LIGHT GREEN
RAL 6018

ORANGE
RAL 2009

WHITE
RAL 9016

BLUE
RAL 5015


YELLOW
RAL 1018

COMPOSITE


www.molderdisnova.com

DELFI PISCINAS

Features




Easy installation

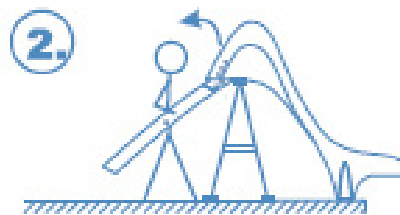

ARE SUPPLIED
IN TWO PIECES:
TRACK &
STAIRS



x 1h

INSTALLATION
IN COMPACT
FLOOR



* The slide must
be fixed both
in the area of
the front foot
and in the area
of the rear
staircase.

Minimum depth of
foundations
40 cm.

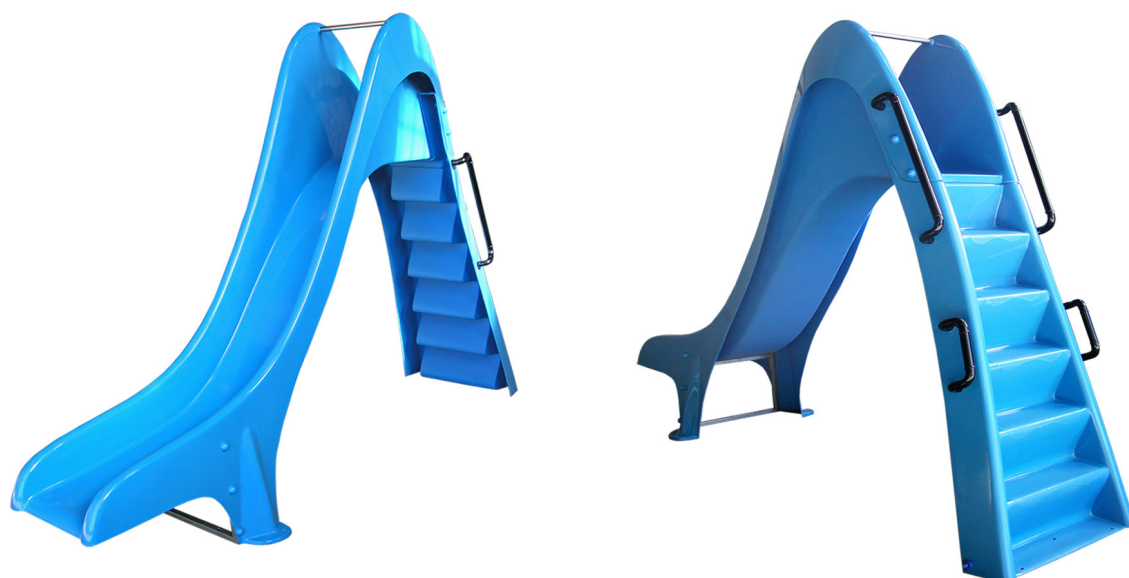

All our DelfiPools models are resistant to water and solar radiation.

They have a safety bar, aluminum handles, high protection barriers and non-slip steps to prevent falls.


Water flows out of the seat bar to keep the track wet.

The screws are protected with vandal-proof caps.

COMPOSITE

www.molderdisnova.com

DELFI PISCINAS CURVE

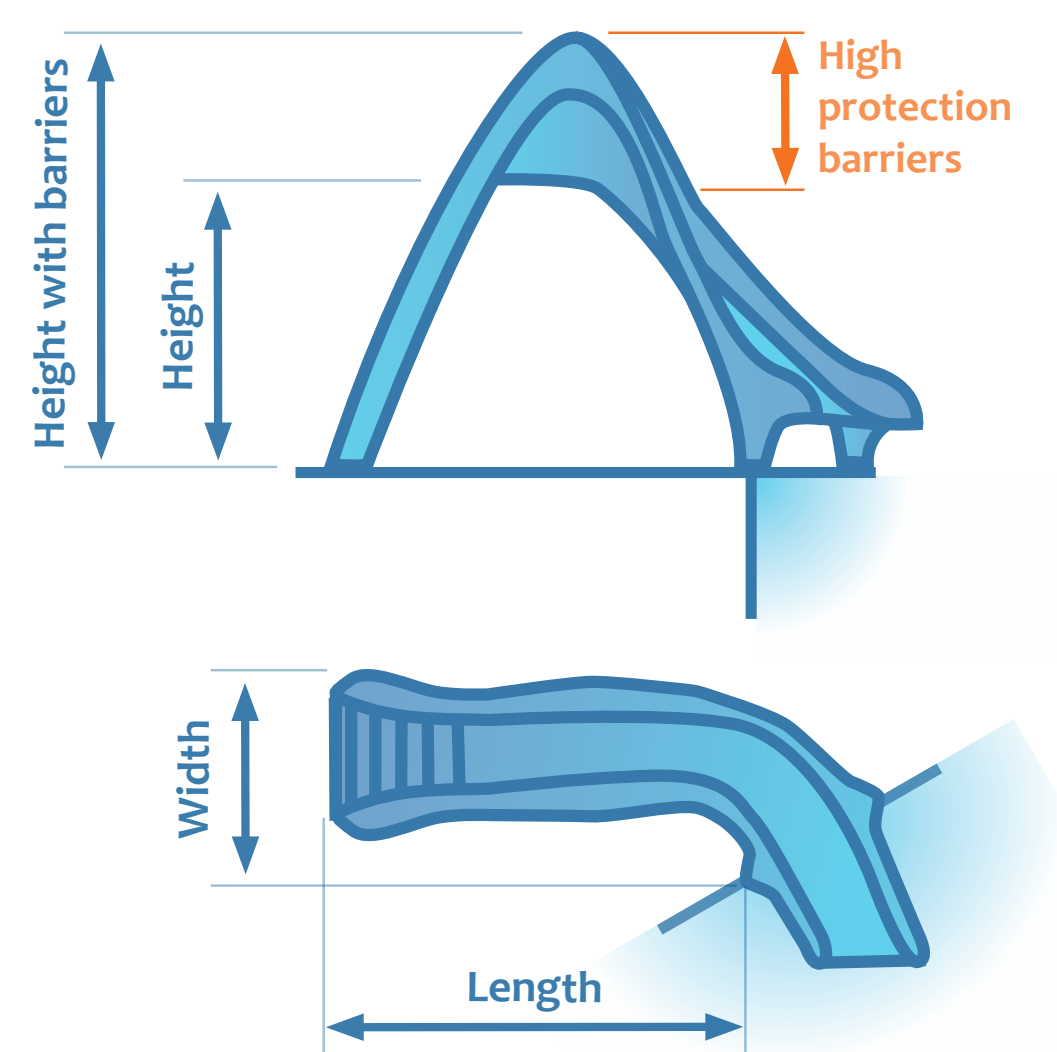

Model	Height	Height with barriers	Length	Width	Maximum weigth
Delfi. P. Curve Left 150	1.500	2.250	2.110	1.210	750 kg
Delfi. P. Curve Right 150	1.500	2.250	2.110	1.210	750 kg
Delfi. P. Curve Left 175	1.750	2.500	2.450	1.210	750 kg
Delfi. P. Curve Rightw 175	1.750	2.500	2.450	1.210	750 kg

DELFIPISCINAS CURVE

4 DIFFERENT MODELS



Delfipiscinas Curve
Right 150



Delfipiscinas
Curve Right 175



Delfipiscinas Curve
Left 150



Delfipiscinas Curve
Left 175