

SERIE T

PE




Polyethylene slides for installation on platforms from 600 mm to 1,500 mm in height. High resistance to UV rays. Installation in 5 minutes. It does not need maintenance. Excellent impact behavior.

Lower nerves for reinforcement.

Stackable in transport.

100% recyclable material. PE.

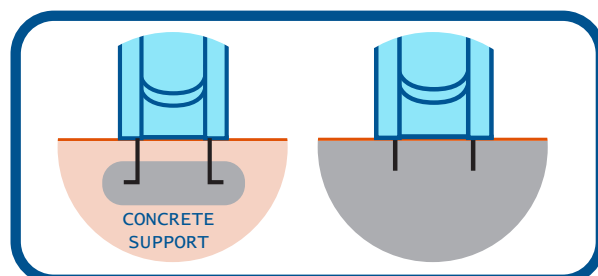

100%
RECYCLABLE

AVAILABLE COLORS:

RED
RAL 3020

BLUE
RAL 5015

YELLOW
RAL 1018

GREEN
RAL 6018

ORANGE
RAL 2009

GREY
RAL 7040



RICE
HUSK

PURE
RECYCLED
RAL 9011

50% RECYCLED
BLUE RAL 5009
APROX.

50% RECYCLED
GREEN RAL 6025
APROX.

Safety clearance distances according to the requirements of the EN1176 standard

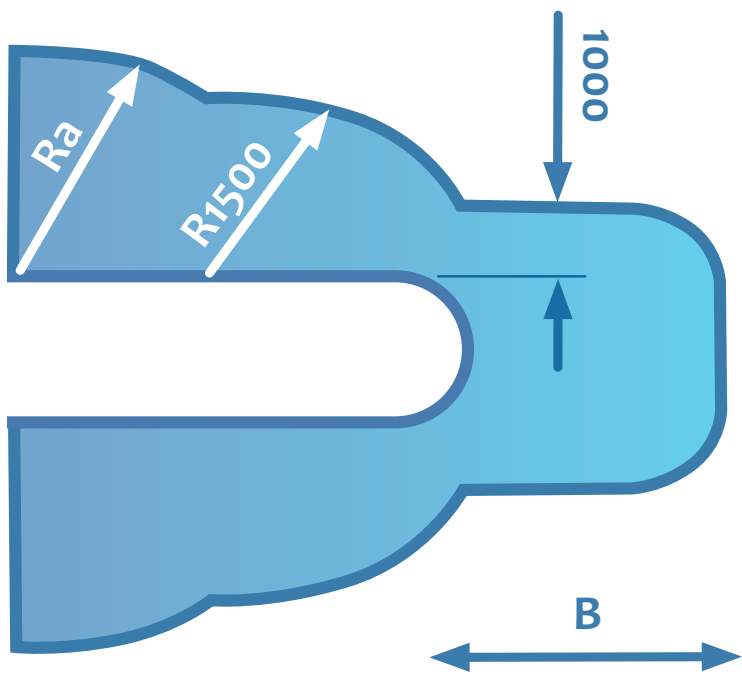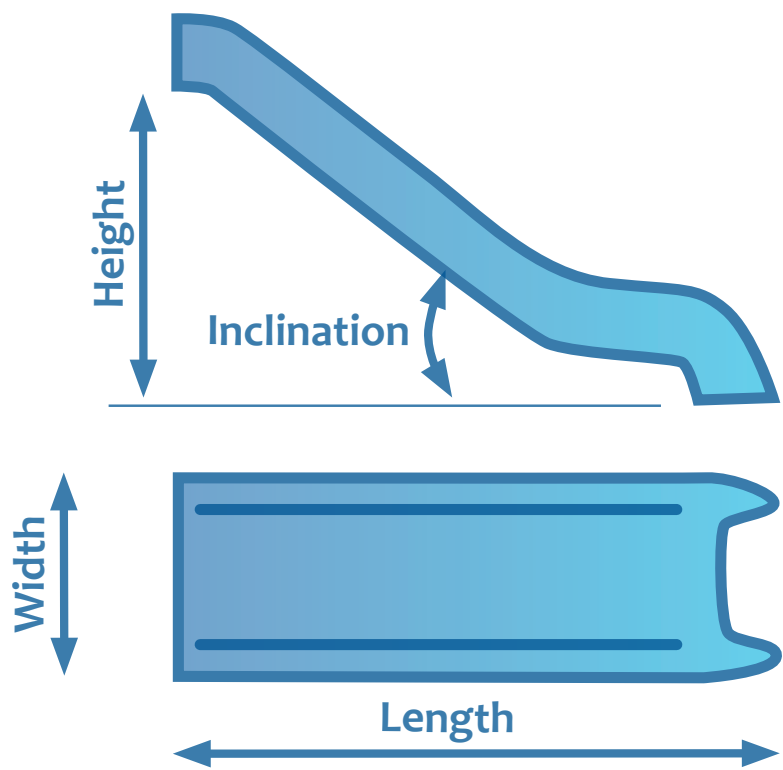

	Height	Length	Width	Inclination	Ra	B
T60	600	1.115	657	39°	1.500	1.500
T90	900	1.660	657	39°	1.500	1.500
T100	1.000	1.784	657	39°	1.500	1.500
T120	1.200	2.030	657	39°	1.500	2.000
T130	1.300	2.154	657	39°	1.500	2.000
T140	1.400	2.279	657	39°	1.500	2.000
T150	1.500	2.243	657	39°	1.500	2.000
T170	1.700	2.648	657	39°	1.630	2.000

Dimensions in mm.



SERIE T



8 DIFFERENT MODELS



T60



T90



T100



T120




T130



T140



T150

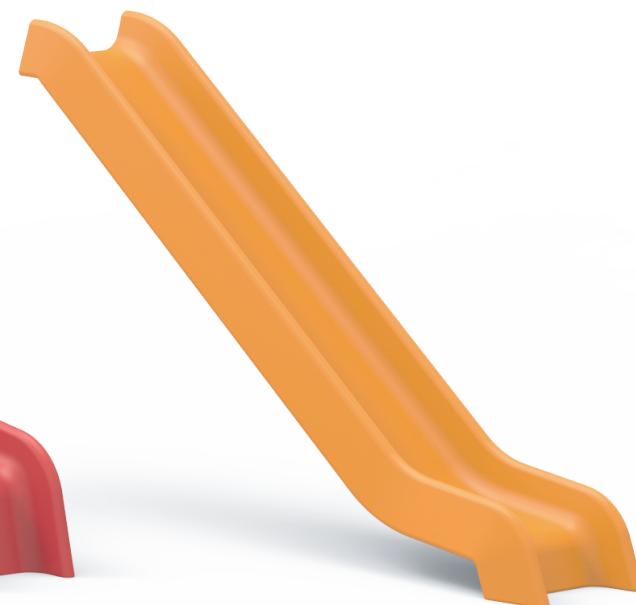

T170

